



myPROXL

SmartProfessional Dryer

Built for **smart businesses** needing **extra capacity, longer durability** and **ultra-speed** on a sensible budget

Benefits and features

► **Topdurability with 15.000+ cycle lifetime**

- Built with commercial components and last six times* longer than domestic dryer
- Drum supported by five roller bearings for long life
- Easy to clean, heavy duty lint screen

► **Faster and more efficient drying process**

- Larger drying load capacity: 12 kg
- Large capacity can handle oversized loads with ease
- Axial airflow ensures the shortest drying time and extremely low energy usage

► **Increased flexibility and serviceability**

- OPL as default, Coin is an optional accessory
- Optional retrofittable stacking kits for dryer+dryer
- Extra large door opening for easy loading and unloading
- Real-time clock for happy hour, promotional pricing
- Roller supported tumbler with less vibration and noise
- Front access for easy serviceability

Accessories

► **Electronic coinmeter for stand alone coin installation**


► **Mechanical coinmeter for stacked coin installation**

► **Retrofittable kits for stacked installation both OPL and coin installation**

Main specifications at a glance

Drying capacity, kg	12
Drum volume, l	218

Dimensions

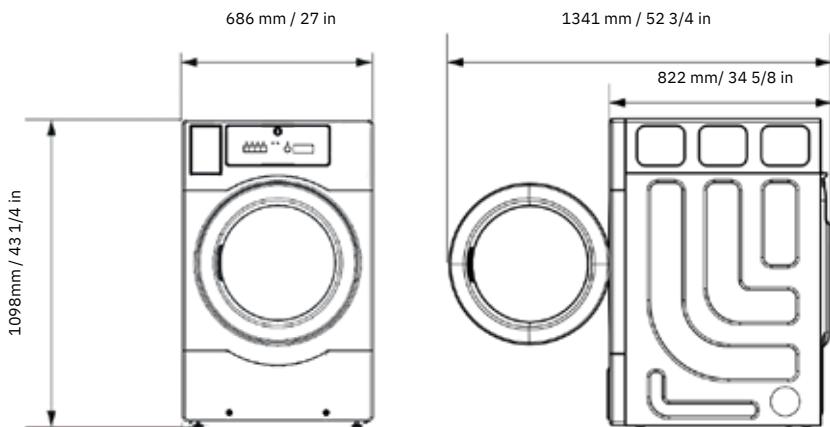

TE1220E

myPROXL Smart Professional Dryer

Specifications TE1220

Heating type	Electric, 4.83 kW
Electrical connection, V/Hz/A	220-240/50/22
	208-240/60/22
Recommended fuse, amps	30
Type of drying	Vented
Air flow (CFM)	151
Motor (HP)	1/4
Declared drying noise, dB(A)	68
Display	LED
Filter	Filter with handle for easier removal
Levelling feet	4 adjustable feet

Connections

Air-outlet diameter (mm/in)	99.8/ 3 7/8
Exhaust outlet diameter (mm/in)	102/4

Programs

Number of programs	
High / Medium /Low / No heat	4

Dimensions

Product - WxHxD (mm/in)	686x1098x822 27x43 1/4x32 3/8
Width Door Opening (mm/in)	1341 /52 3/4
Carton - WxHxD (mm/in)	770 x 1290 x 880 30 3/8 x 50 3/4 x 34 5/8
Weight - product/carton (kg/lb)	154/190 70/86

