



myPROzip SmartProfessional Dryer

Especially designed for small businesses.

The machine with a Professional heart, on a sensible budget, boasting benefits from a professional design.

Benefits and features

- ▶ **Superb capacity and performance:**
 - Process all laundry in one go thanks to generous 8 kg capacity
- ▶ **Outstanding flexibility and garment care:**
 - Two drying temperature options (low and medium)
 - Greater peace of mind: optional direct connection

from condensed water tank to drain for instant discharge

- ▶ **Triple the lifetime¹:**
 - Extra long lifetime due to more durable machine construction with professional components
 - Less vibration and noise: below 70 dB based on specially designed transmission system, condenser and panelling
 - No chemical corrosion: stainless steel front and top
- ▶ **Prepared for connection to external payment systems**

Perfect for small operations such as

- Small hotels and bed & breakfasts (guest use)
- Out-of-home resident services
- Camping, marina, petrol stations, student houses

Accessories

- ▶ Pedestal
- ▶ Stacking kit
- ▶ Coin meter

Option

- ▶ Marine kit

¹ Compared to domestic machines

Main specifications at a glance


| | |
|-------------------------|-----------|
| Drying capacity, kg | 8 |
| Drum volume, l | 120 |
| Condensation efficiency | A (> 90%) |

Consumption data

Program standard, cotton 60 °C, full load

| | |
|--------------------------------|------|
| Total time, min./cycle | 129 |
| Energy consumption, kWh | 4.88 |
| Annual energy consumption, kWh | 560 |

Dimensions

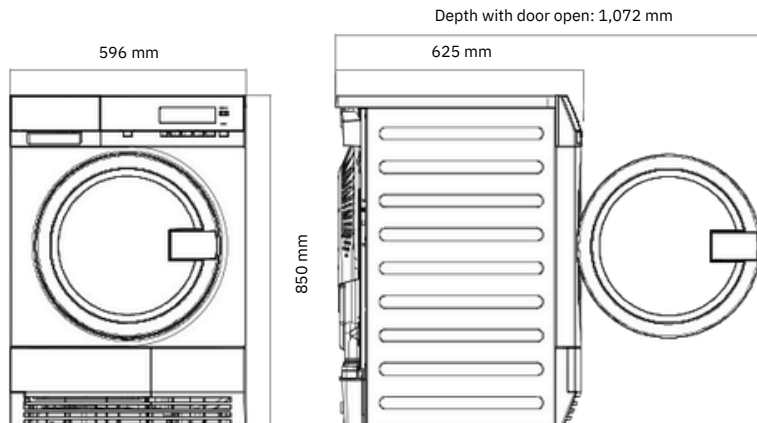

myPROzip Smart Professional Dryer

Specifications TE1120P

| | |
|---------------------------------|--|
| Drying technology | Condense (Electric Heating Elements) |
| Electrical connection, V / Hz/W | 230 - 240 / 50-60/2600 * *(1900 + 700) |
| Declared drying noise, dB(A) | < 70 |
| Display | Large LCD |
| Drum light | Yes |
| Door lock device | Pull to open with child safety (can be opened from inside by applying force of 70N) |
| Filter | Filter with handle for easier removal |
| Filter sensor | The machine does not start if the filter is not in position (preserve machine integrity) |
| Levelling feet | 4 adjustable feet (adjustable by 15mm) |

Programs




| | |
|---------------------------------|---------------|
| Number of programs/temperatures | 2 |
| | Low Medium |

Special features

| | |
|---|-----------|
| Pedestal | Accessory |
| Stacking kit | Accessory |
| Coin meter | Accessory |
| Marine kit | Optional |
| Prepared for connection to external payment systems | Standard |

Dimensions including the door frame

| | |
|-----------------------------|-----------|
| Height (A), mm | 850 |
| Width (B), mm | 596 |
| Depth (C), mm | 625 |
| Packaging height, mm | 890 |
| Packaging width, mm | 630 |
| Packaging depth, mm | 705 |
| Weight (with packaging), kg | 44 (45.5) |

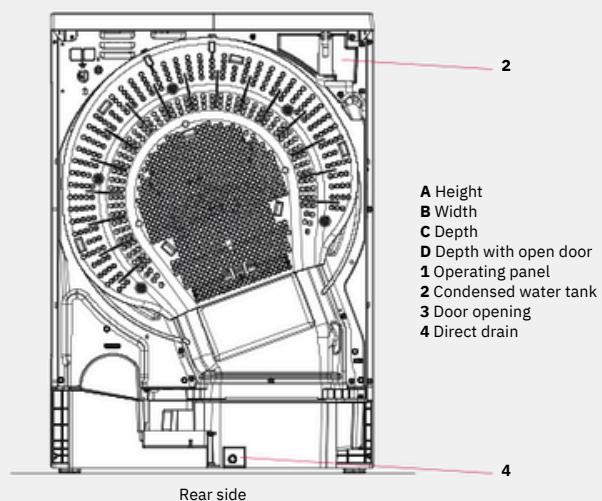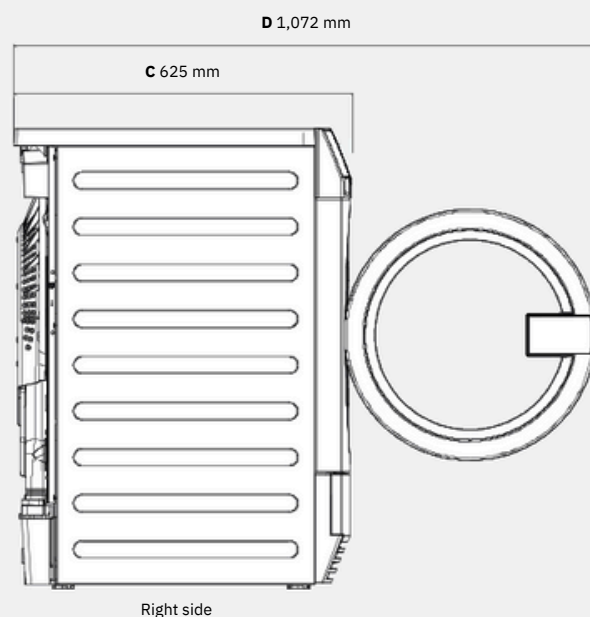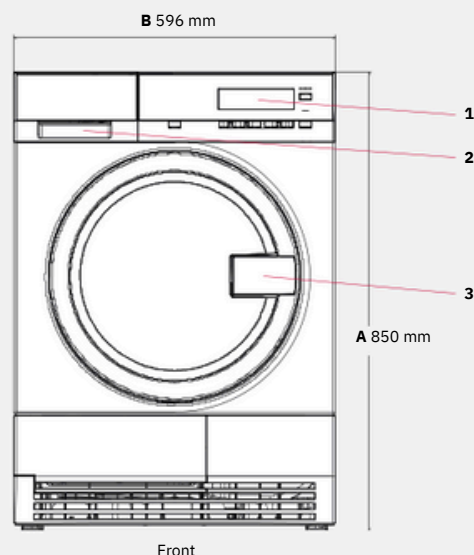

- A Height
- B Width
- C Depth
- D Depth with open door
- 1 Operating panel
- 2 Condensed water tank
- 3 Door opening
- 4 Direct drain

We reserve the right to alter specifications without notice.